


FOR CARRIER PIPE SIZES
UP TO 12", 20" STEEL
CASING MIN. THICKNESS
.250" CONFORM TO ASTM A-36

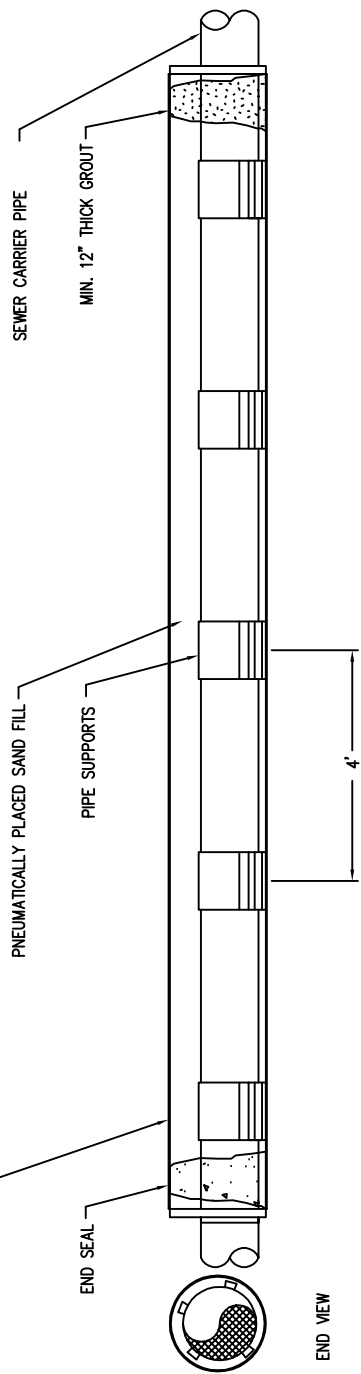

PIPE SUPPORTS FOR PVC AND DIP
SEWER ARE CALPICO MODEL PX OR
EQUIVALENT, SIZE SKID HEIGHT
TO PROVIDE 4" GAP BETWEEN PIPE
BELL AND TOP OF CASING.

TYPICAL BORING PROFILE

NTS

SEWER STANDARD DETAIL
NORTHEAST SAMMAMISH
SEWER AND WATER DISTRICT

FILE	SCALE	DATE
SAMDTS9	NTS	9/13/93